




VICTORY 4X4

# UNIVERSAL SIDE ACCESSORY PANEL

## INSTALL INSTRUCTIONS

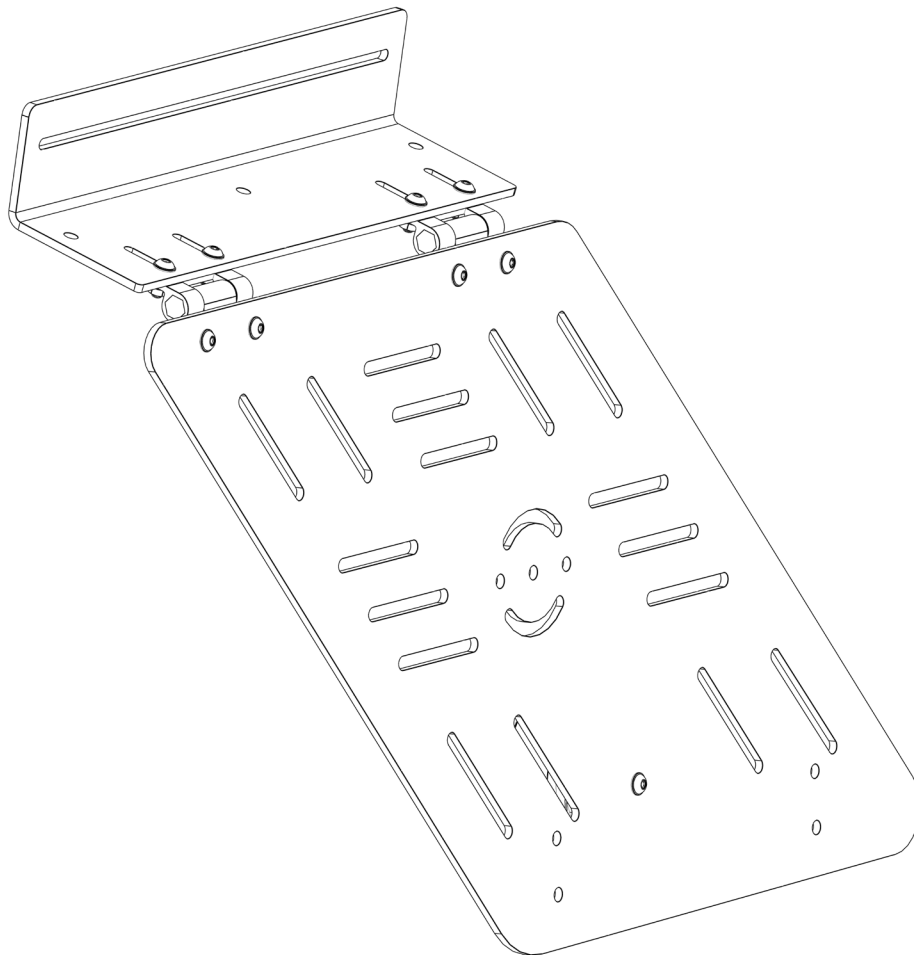


**Please read the mounting instructions below carefully before attempting to install.**

**Be sure to check out the install video on the product page, if available.**

Thank you for purchasing from Victory 4x4! Checkout our website, [victory4x4.com](http://victory4x4.com) for other great off-road products. Be sure to rate and review our product online. If you have any questions or are missing parts, please don't hesitate to call us at 269-459-8447!


# INCLUDED HARDWARE

8x




1/4"-20 X 3/4"  
Button Head

1x




1/4"-20 X 3/8"  
Button Head

8x



1/4"-20  
Serr. Flange Nut


9x




1/4" ID  
Washer

# INCLUDED PARTS


1x

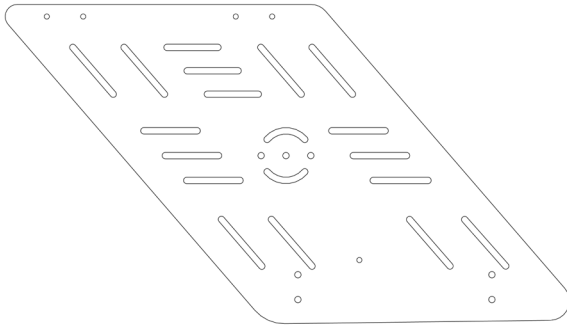


1x



1x




2x




# INSTALLATION

- 1 Start by loosely mounting the two hinges to the four slots in the bent bracket using the 1/4"-20 X 3/4" bolts, 1/4" ID washers and 1/4"-20 serr. flange nuts. It doesn't matter which side of the hinge as long as you put the flat side of the hinges on the bottom of the bracket. If you plan on using the friction adjustment on the hinge (the extra screw in the middle of one side) then it may be best to mount the side without the friction adjustment to the bracket.

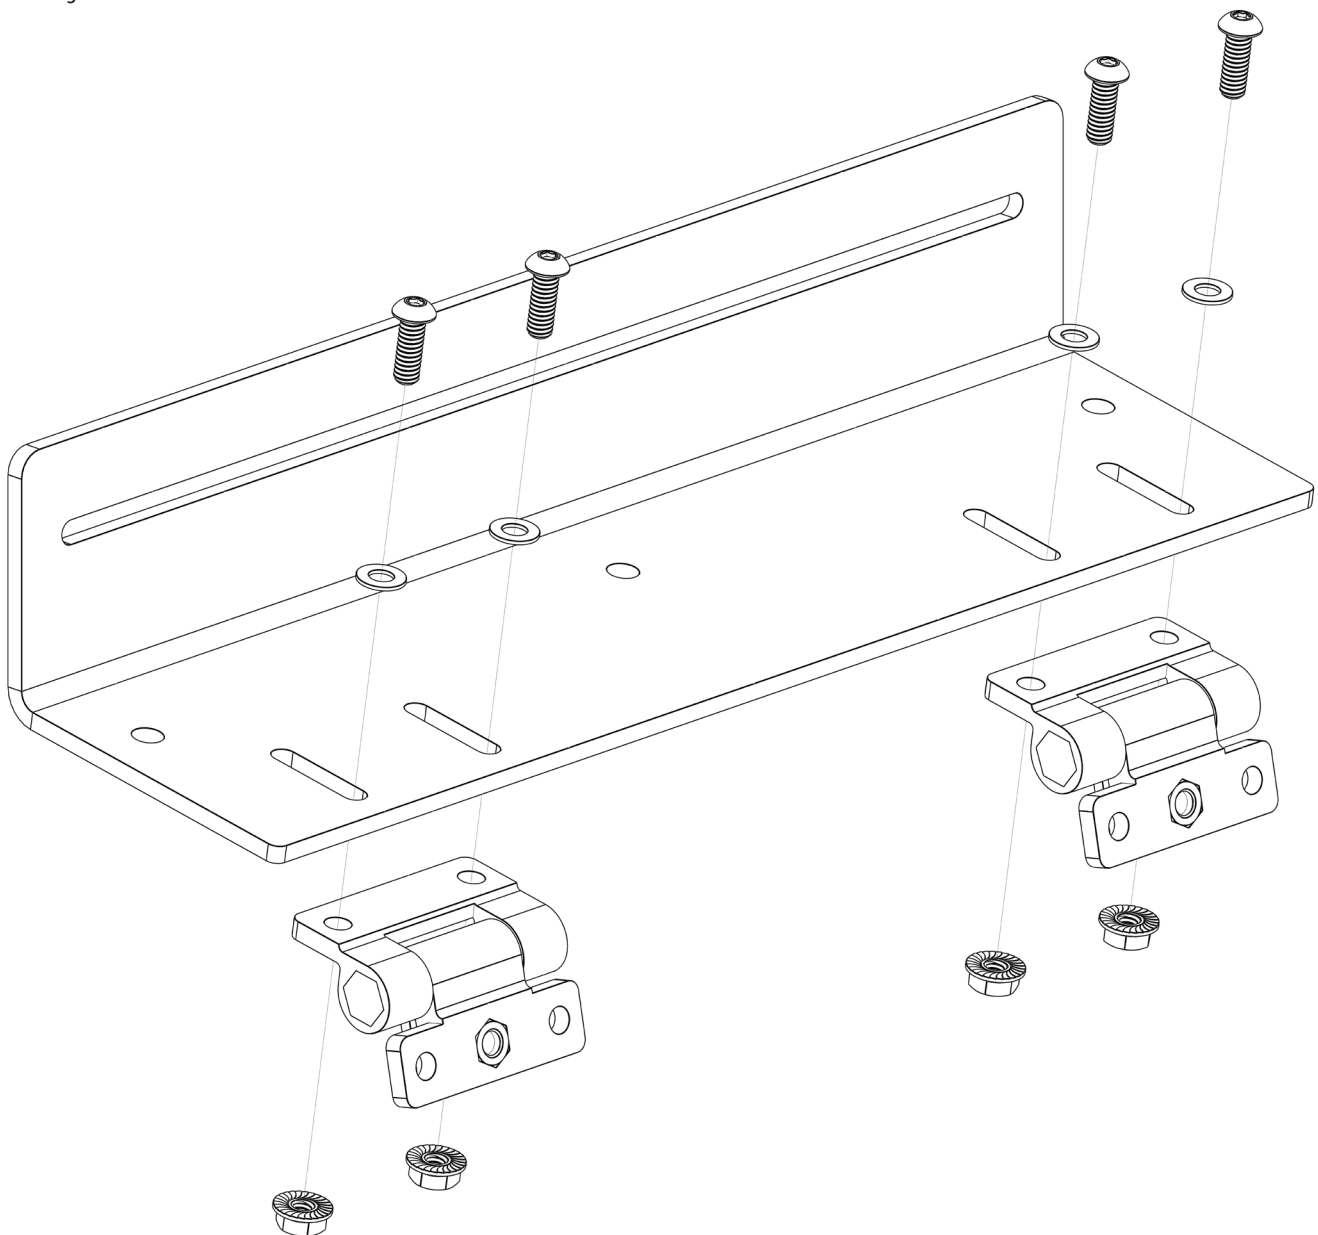


# INSTALLATION

- 2** Next, attach the panel to both hinges using the 1/4"-20 X 3/4" bolts, 1/4" ID washers and 1/4"-20 serr. flange nuts. Make sure that the flat side of the hinge is against the back of the panel.

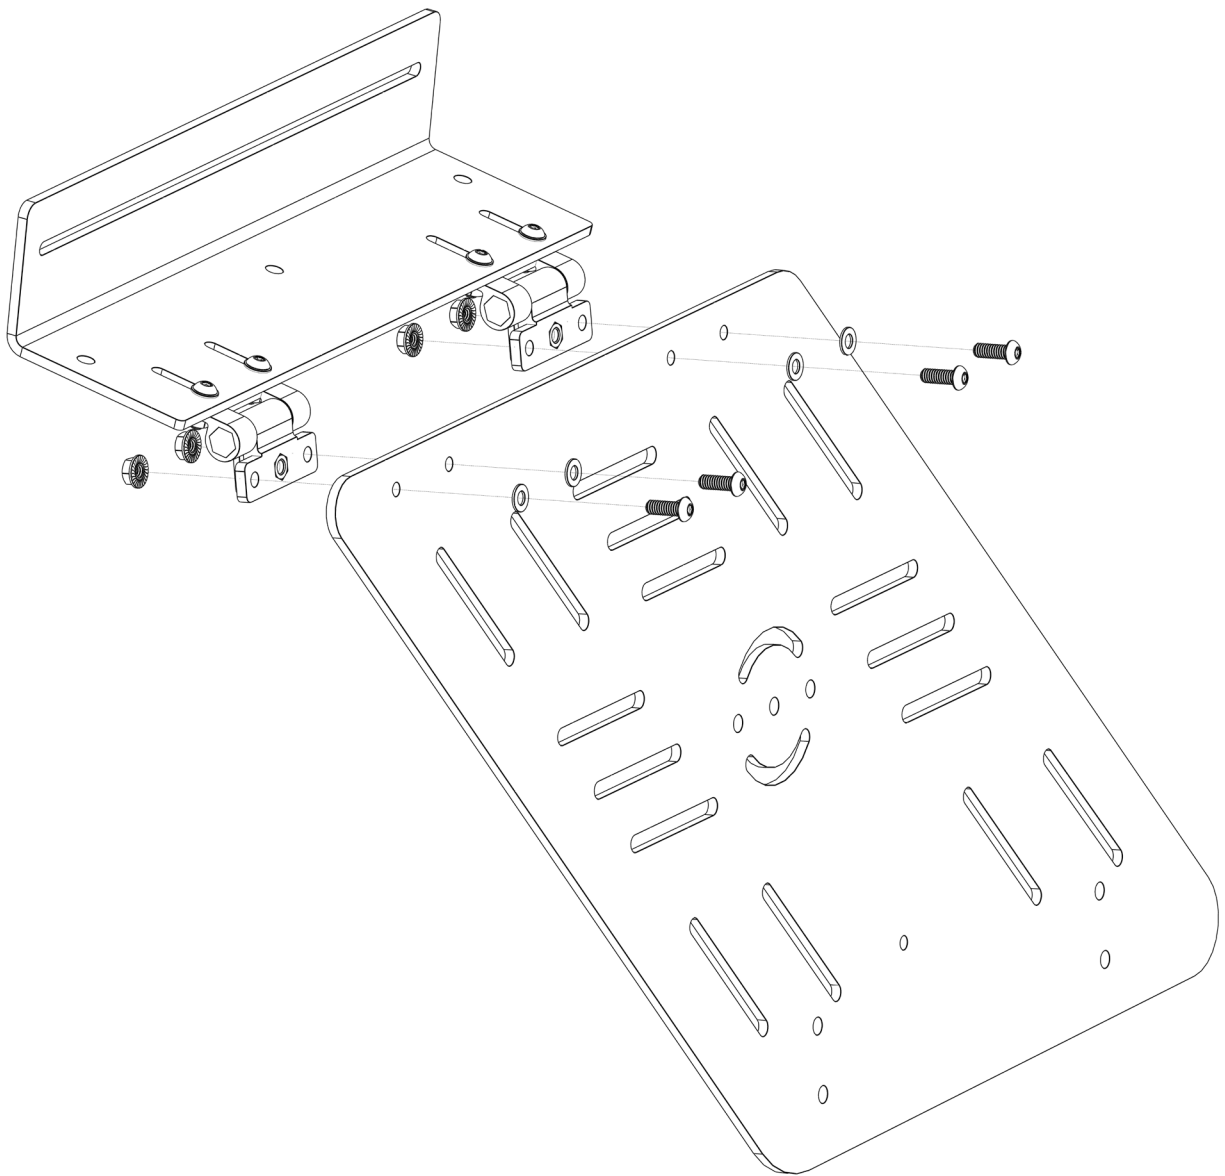


# INSTALLATION

- 3** Next, mount the suction cup on the backside of the panel using the 1/4"-20 X 3/8" bolt and 1/4" ID washer. Make sure the button is pointing straight down.

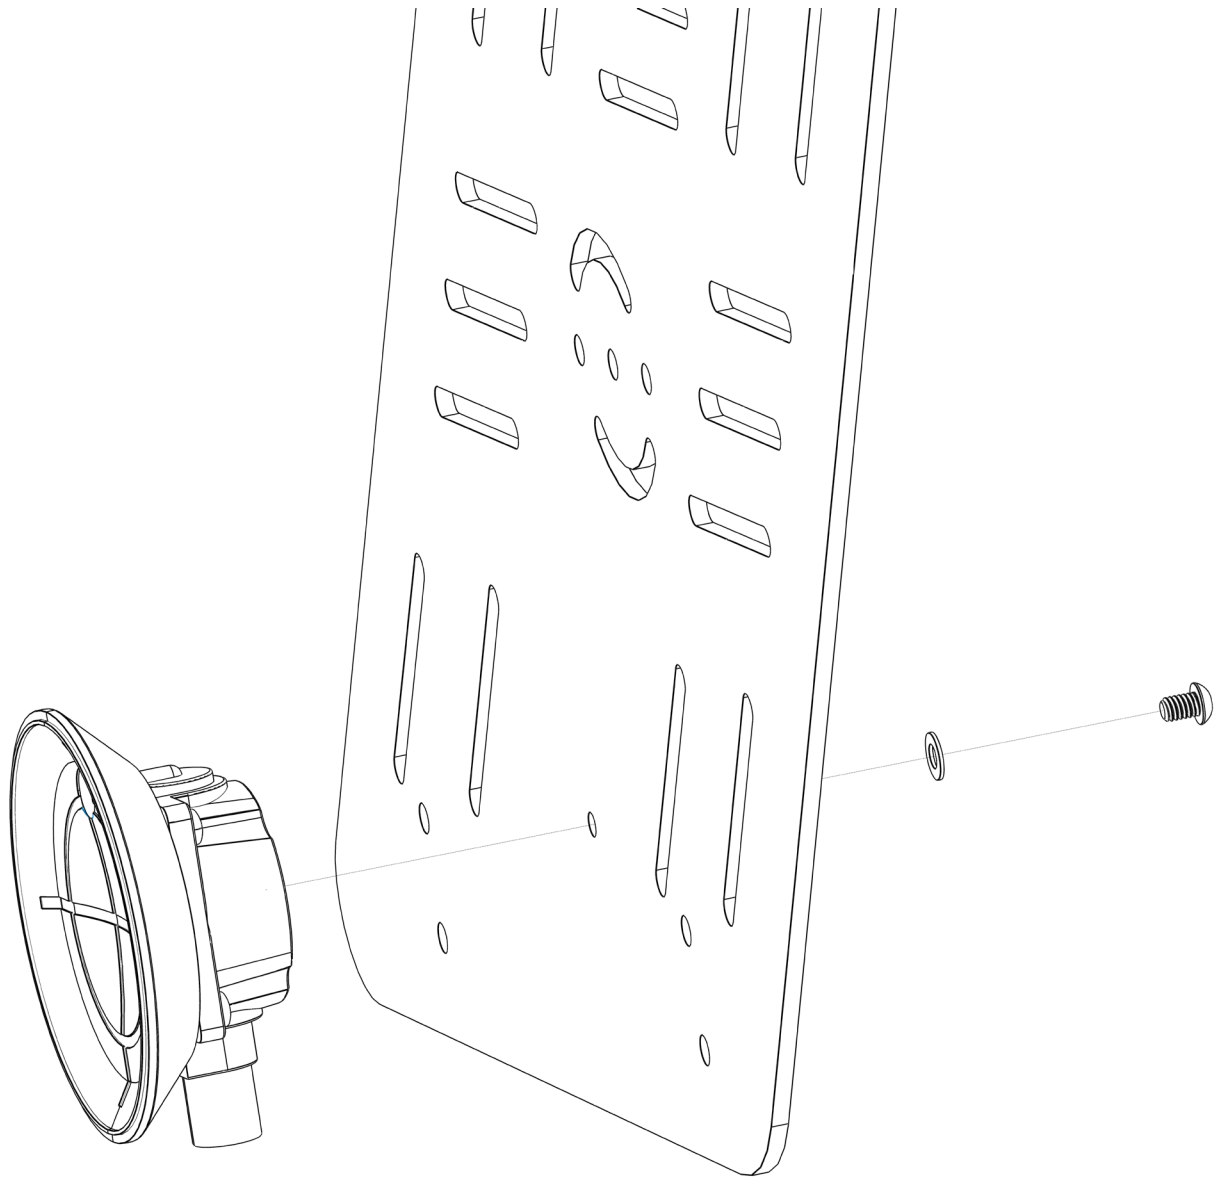

# INSTALLATION

- 4** With the panel assembled, it can now be mounted to the roof rack. To do this, determine which two cross bars you could mount it to in order to position the panel over the rear window. Then, remove the bolts from the one end of the crossbars and use those bolts to mount the panel to the side of the roof rack and back into the bars. Position the bracket so that the panel is right over the rear window, then tighten it fully into place.

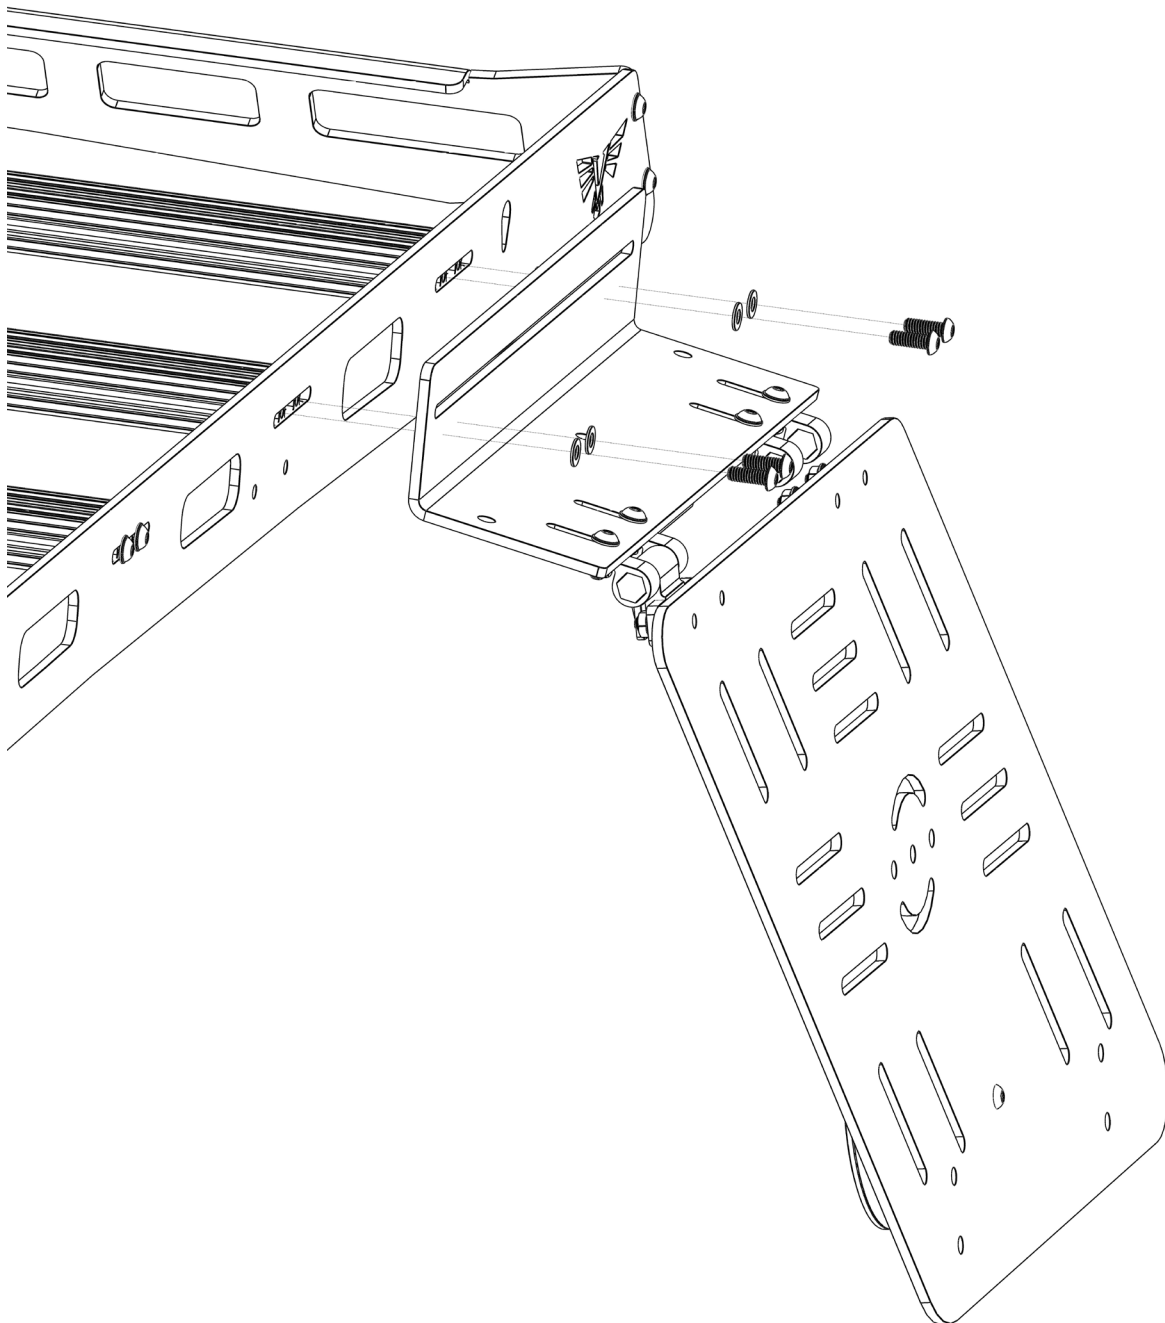

# INSTALLATION

- 5** Finally, once the panel is positioned horizontally, make any adjustments necessary to the angle of the panel or position of the hinges in order to get the suction cup to sit as flat as possible against the window. Once it is where you want it, clean off the window and then press the button on the bottom of the suction cup a few times secure it to the glass. Then go back and fully tighten any bolts left loose earlier.